
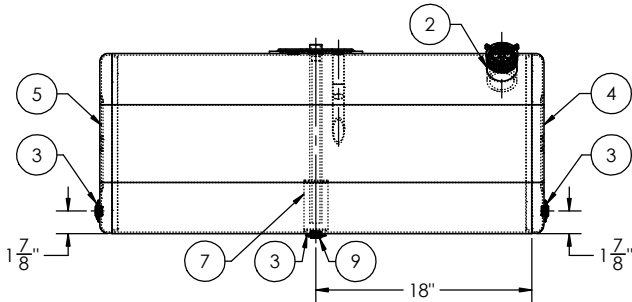
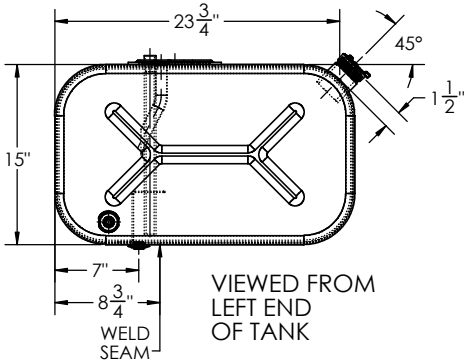
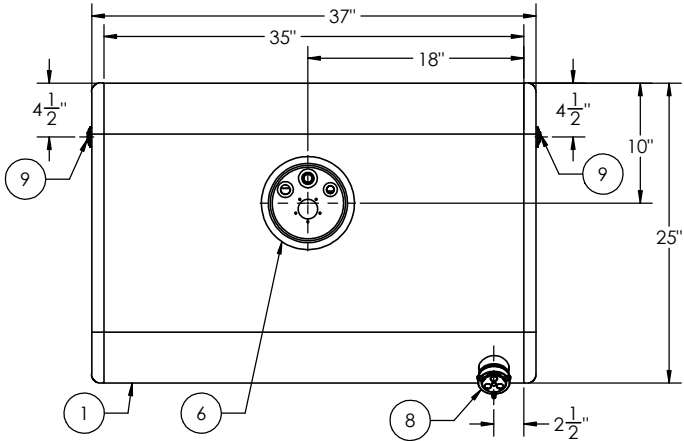


GALLONS	55	52	N/A	N/A
LITERS	208	198	N/A	N/A
	TOTAL CAPACITY	USEABLE CAPACITY	TOTAL CAPACITY	USEABLE CAPACITY
	DIESEL FUEL		BIO-DIESEL/ HYDRAULIC/WATER	

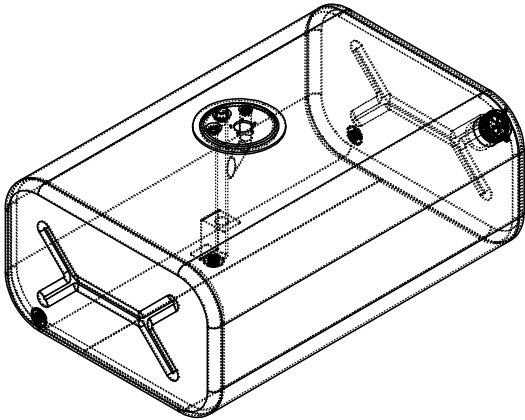

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	BRL-AT-IN-2010	1/8" TANK BARREL	1
2	FLN-0481012230	3" LONG - 2" NPSM - 11.5 TPI MILGRADE ALUMINUM FILL NECK	1
3	FLG-050220	1/2" NPTF MILGRADE ALUMINUM FLANGE	3
4	ECP-1525-RIGHT 4.5	15" X 25" MILGRADE ALUMINUM RECTANGULAR END CAP WITH 1/2" FLANGE 4-1/2" FROM RIGHT	1
5	ECP-1525-LEFT 4.5	15" X 25" MILGRADE ALUMINUM RECTANGULAR END CAP WITH 1/2" FLANGE 4-1/2" FROM LEFT	1
6	ADP-52222240	15" MILGRADE ALUMINUM DITCH SIDE INTERNATIONAL ADAPTER PLATE	1
7	STR-001 (FLAT 1.125)	SMALL TUBE STABILIZER (1.125)	1
8	FCP-1330 (600133)	2" NON-VENTED, NON-LOCK CAP	1
9	94135	1/2" SOCKET PIPE PLUG 3/4" TAPER NPTF ZINC	3

TITLE: 15" H x 25" W x 35" L				UNLESS OTHERWISE SPECIFIED:		NAME		DATE	
SIZE C	REV	QC	INITIALS	DIMENSIONS ARE IN INCHES		DRAWN	 THE PUL TANK SOCIETY 11317 N. US HWY 14 HARVARD, IL 60033 800-652-6630 FAX 855-774-6918 WWW.ALUMITANK.COM 815-943-6649 INFO@ALUMITANK.COM		
		PSI		TOLERANCES:		CHECKED			
		DIMS		FRACTIONS: ±		ENG APPR.			
		PARTS		ANGULAR: MACH ± BEND ±		MFG APPR.			
		TAG		TWO PLACE DECIMAL ±		G.A.			
		PKG		THREE PLACE DECIMAL ±		COMMENTS:			
				INTERPRET GEOMETRIC TOLERANCING PER:					
				MATERIAL: 5052 H32 ALUMINUM					
				FINISH: SEE BOM					
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ALUMITANK. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ALUMITANK IS PROHIBITED.				DO NOT SCALE DRAWING		DWG. NO. AT-IN-2010		REV. A	
						SCALE: 1:8		WEIGHT: 43.96	
								SHEET 2 OF 2	